

**Features**

- Low Loss
- High Rejection
- Excellent Return Loss


**Description**

Surface mount, silver (Ag) coated ceramic bandpass filter.

Weight: 7.04 grams typical

Material: Filter is composed of a Neodymium based ceramic block plated with Ag.

Filter complies with RoHS standards.

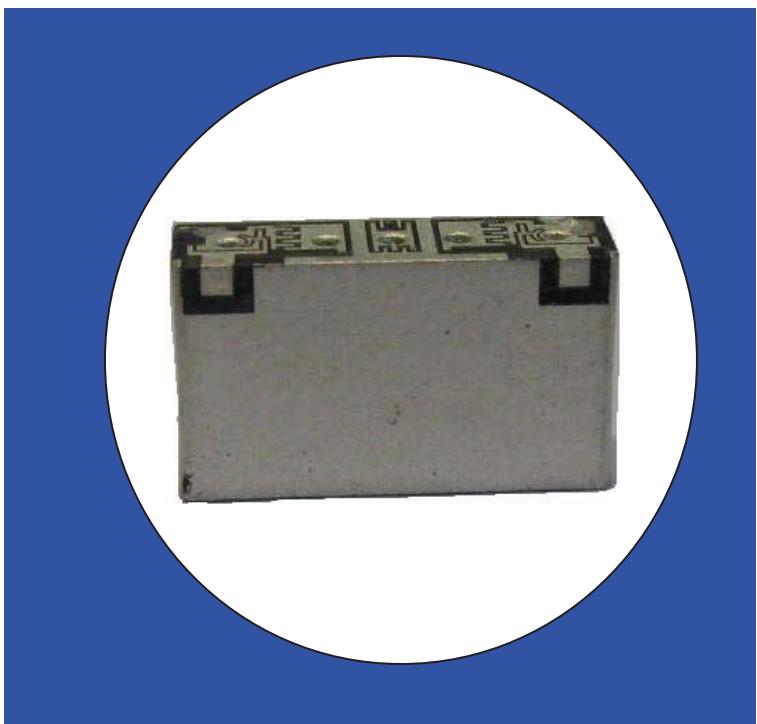**Electrical Specifications**

<u>Parameter</u>	Frequency MHz	Typical @ 25°C	Specification @ 25°C	Spec over -40°C to +85°C
Passband loss	829 - 934	-1.8	-2.3	-2.5
Passband Ripple	849 - 934	0.8	1.1	1.2
Passband Return Loss @ Port 1	849 - 934	-14.0	-12.0	-12.0
Passband Return Loss @ Port 2	849 - 934	-14.0	-12.0	-12.0
Passband Phase Variation from linear	849 - 934	+/- 11°	+/- 16°	+/- 16°
Attenuation	0.1 - 230	-60.0	-25.0	-25.0
	230 - 700	-50.0	-15.0	-15.0
	1050	-50.0	-45.0	-45.0
	1350	-40.0	-35.0	-35.0
	1679 - 1740	-30.0	-25.0	-25.0
Power into any port		1 Watt max		

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


Specification Allowance

Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

\*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562;US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;DE 0573597;FR 0573597;JP 508149/92;KR 142171;US 5,162,760;US 5,218,329;US 5,250,916;US 5,327,109;US 5,488,335;CA 2114029;FR 9306297;GB 2273393;JP 3205337;KR 115113;CN 93106228.4;US 5,512,866;EP 0706719;DE 0706719;FR 0706719;GB 0706719;CN 95190359.4;US 5,602,518;KR 5,721,520;US 5,745,018;EP 0910875;DE 0910875;DK 0910875;FR 0910875;GB 0910875;IE 0910875;JP 505182/98;KR 10-323013;US 5,994,978;US 6,462,629;CN 00810420.4;US 6,559,735;US 6,650,202;US 6,834,429. Other US and foreign patents pending.


CTS Corporation 2006 reserves all copyrights in the layout, design and configuration of the patterns on this product."

### Mechanical Drawing

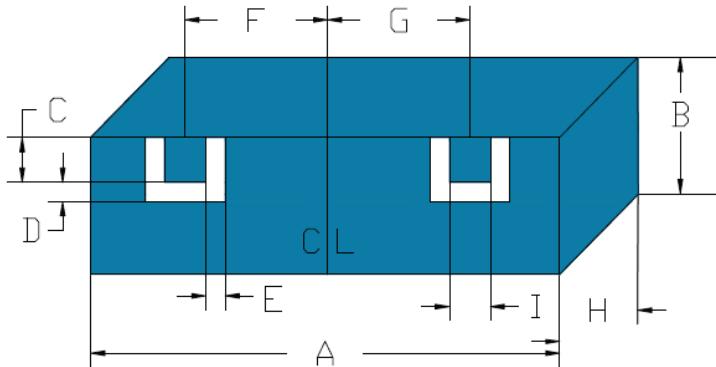


Dim	Nominal (mm)	Tolerance (mm) +/- or max
<b>A</b>	14.60	Max
<b>B</b>	8.10	Max
<b>C</b>	1.02	0.13
<b>D</b>	0.64	0.13
<b>E</b>	0.64	0.13
<b>F</b>	5.78	0.13
<b>G</b>	5.60	0.13
<b>H</b>	4.50	Max
<b>I</b>	1.02	0.13

### Electrical response

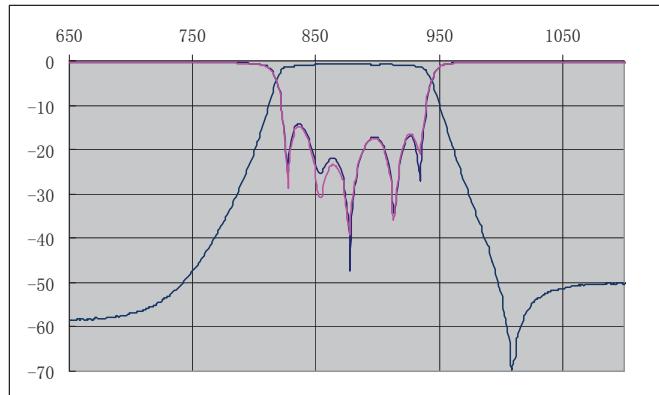

### PCB Layout

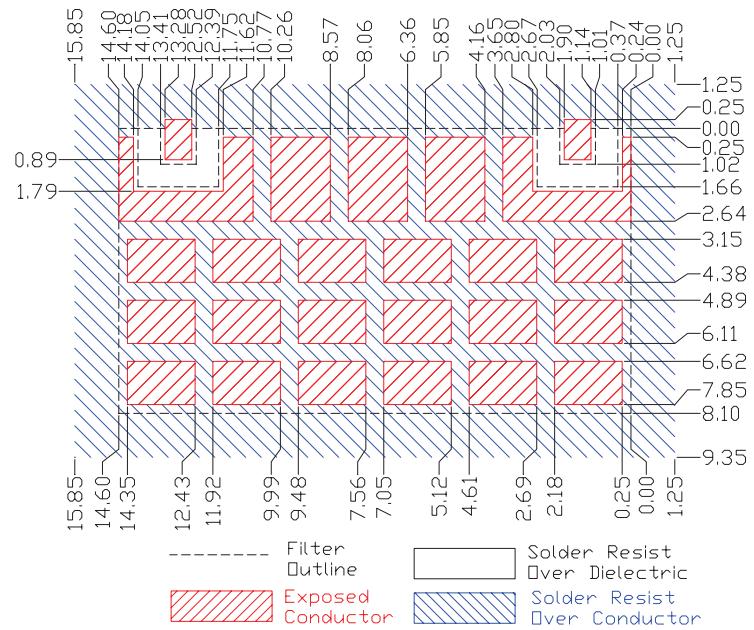


### Packaging and Marking



DIMENSION	UNITS	SPECIFICATION
REEL DIAMETER	mm	330
REEL WEIGHT	kg	2.3
REEL QUANTITY	ea.	250

CTS  
820  
YWW

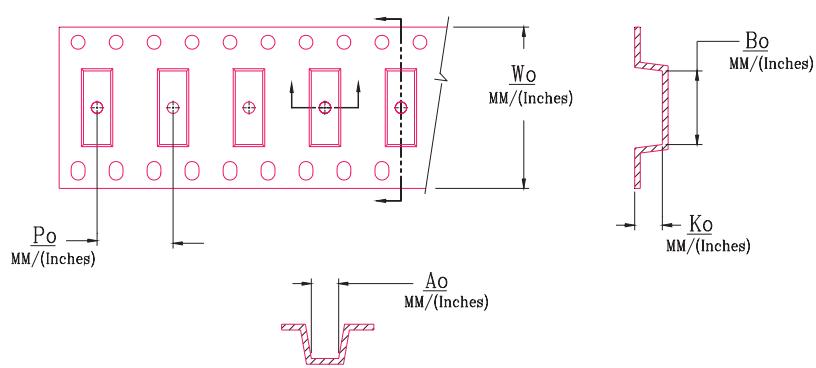

$W_o$ Inches/mm	$A_o$ Inches/mm	$B_o$ Inches/mm	$K_o$ Inches/mm	$P_o$ Inches/mm
0.945"/24	0.331"/8.4	0.575"/14.6	0.177"/4.5	0.630"/16