

USD003C

Band 3 USD Series Duplexer

Features

- Low Loss with High Rejection
- Superior power handling and reliability
- Universal footprint across all FDD frequency bands

Applications

- Wireless Infrastructure applications
- High-performance carrier-grade small-cells using linearized PA for 1.0-2.0W at the antenna port.
- Wide-band pico-cells or small-cells requiring multi-channel or carrier aggregation.



Part Dimensions: 63.0 × 12.4 × 10.6 mm • 23.3 g
Materials: Ag plated ceramic block with tin plated brass shield

Description

Surface mount ceramic duplexer supports a universal footprint across all FDD frequency bands enabling the use of a common system PCB. Provides superior rejection, insertion loss, reliability, as well as both peak and average power handling compared to other duplexer technologies.

Electrical Specifications

Parameter	Frequency (MHz)	Typical at 25°C	Spec. at 25°C	Spec. over -40°C to +85°C
Nominal Impedance	-	50 ohms	-	-
Average Input Power	-	-	-	6.0 Watt max
Peak Input Power	-	-	-	60 Watt max

Antenna to UL Response

Passband Insertion Loss (5 MHz avg)	1710 - 1785	2.6 dB	2.9 dB max	2.9 dB max
Passband Return Loss	1710 - 1785	11 dB	10 dB min	10 dB min
Attenuation:	1805 - 1880	66 dB	64 dB min	64 dB min

DL to Antenna Response

Passband Insertion Loss (5 MHz avg)	1805 - 1880	2.6 dB	2.8 dB max	2.8 dB max
Passband Return Loss	1805 - 1880	11 dB	10 dB min	10 dB min
Attenuation:	1710 - 1785	69 dB	68 dB min	68 dB min


DL to UL Response

Attenuation for UL band (5 MHz avg)	1710 - 1785	71 dB	70 dB min	70 dB min
Attenuation for DL band (5 MHz avg)	1805 - 1880	66 dB	64 dB min	64 dB min

Note: CTS tests each unit to the critical specifications above. Subsequent audits may deviate due to repeatability among different test systems which shall not exceed these allowances.


Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Attenuation	1.0 dB

Mechanical Drawing

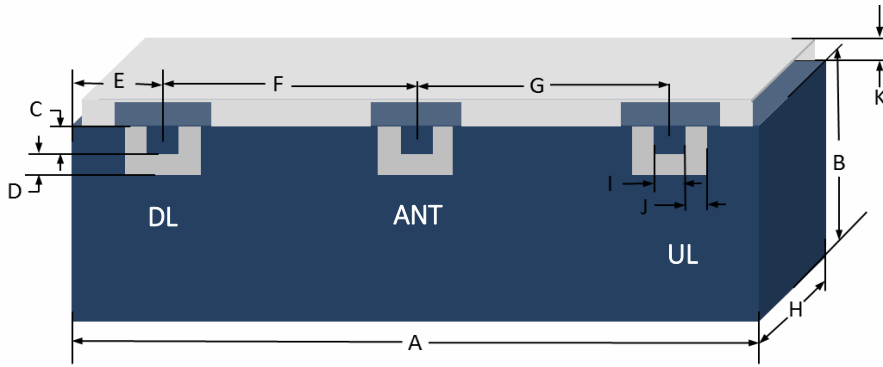


Dim.	Nominal (mm)	Tolerance (±mm or Max)
A	63.0	Max
B	10.00	Max
C	2.03	0.13
D	1.27	0.13
E	7.19	0.13
F	24.21	0.13
G	24.21	0.13
H	10.60	Max
I	2.03	0.13
J	1.27	0.13
K	2.20	0.20

PCB Layout

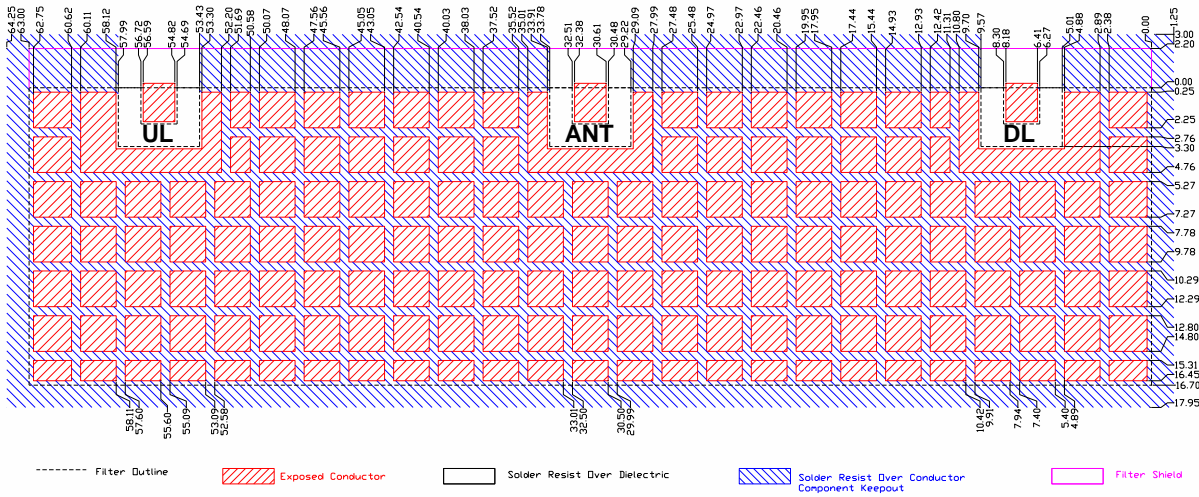


Packaging and Marking

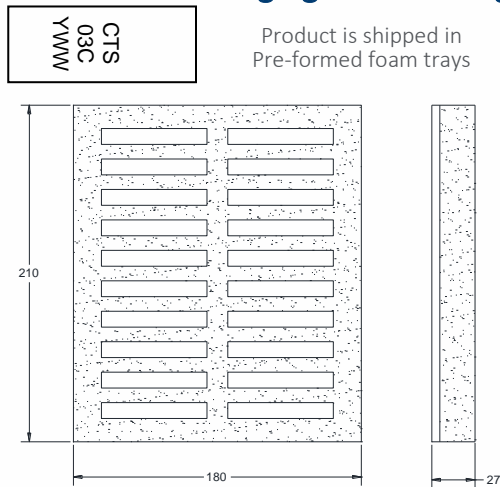

The trays have 20 slots each with 1 filter per slot. Boxes are packed with 12 Trays per box for a total of 240 filters per box.

Electrical Response

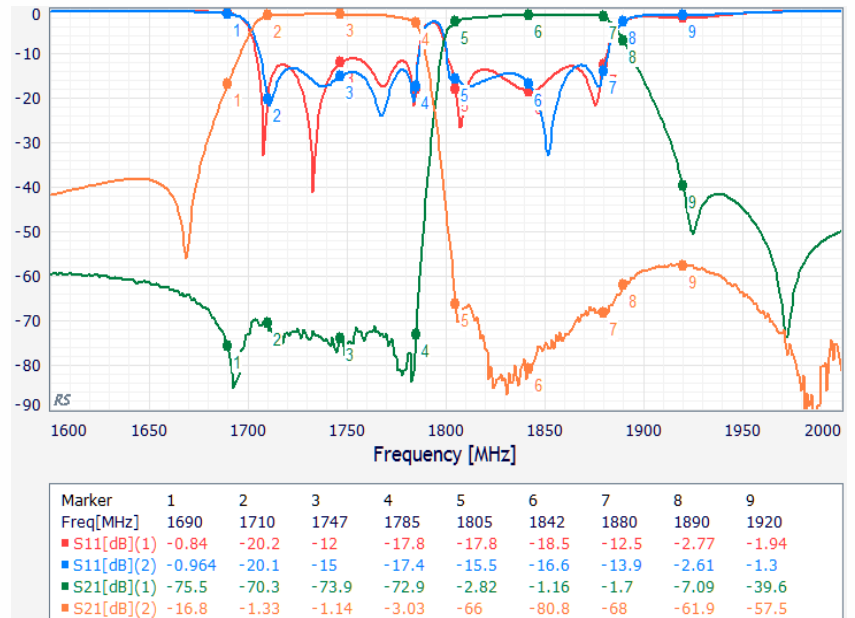



Electrical Specifications – Supplemental Spectrum Specifications

Parameter	Frequency (MHz)	Typical at 25°C	Spec. at 25°C	Spec. over -40°C to +85°C
Antenna to UL Response				
Attenuation:	1-960		66 dB min	66 dB min
	960-1463		45 dB min	45 dB min
	1463-1591		35 dB min	35 dB min
	1591-1690	16 dB	12 dB min	12 dB min
	1880-2690		37 dB min	37 dB min
DL to Antenna Response				
Attenuation:	1-1710		40 dB min	40 dB min
	1786-1795		5 dB min	5 dB min
	1890-1919	7 dB	5 dB min	5 dB min
	1920-1980	39 dB	37 dB min	37 dB min
	1981-2690		40 dB min	40 dB min

Wideband Response