

# USD007A

## Band 7 USD Series Duplexer

### Features

- Low Loss with High Rejection
- Superior power handling and reliability
- Universal footprint across all FDD frequency bands

### Applications

- Wireless Infrastructure applications
- High-performance carrier-grade small-cells using linearized PA for 1.0-2.0W at the antenna port.
- Wide-band pico-cells or small-cells requiring multi-channel or carrier aggregation.



Part Dimensions: 61.4 × 8.8 × 10.9 mm • 14.1 g  
Materials: Ag plated ceramic block with tin plated brass shield

### Description

Surface mount ceramic duplexer supports a universal footprint across all FDD frequency bands enabling the use of a common system PCB. Provides superior rejection, insertion loss, reliability, as well as both peak and average power handling compared to other duplexer technologies.

### Electrical Specifications

Parameter	Frequency (MHz)	Typical at 25°C	Spec. at 25°C	Spec. over -40°C to +85°C
Nominal Impedance	-	50 ohms	-	-
Average Input Power	-	-	-	6.0 Watt max
Peak Input Power	-	-	-	60 Watt max

#### Antenna to UL Response

Passband Insertion Loss (5 MHz avg)	2500 - 2570	1.8 dB	1.9 dB max	2.1 dB max
Passband Insertion Loss (single point)	2500 - 2570	2.1 dB	2.2 dB max	2.4 dB max
Passband Return Loss	2500 - 2570	15 dB	12 dB min	12 dB min
Attenuation:	2620 - 2690	66 dB	64 dB min	64 dB min

#### DL to Antenna Response

Passband Insertion Loss (5 MHz avg)	2620 - 2690	1.8 dB	1.9 dB max	2.1 dB max
Passband Insertion Loss (single point)	2620 - 2690	2.0 dB	2.1 dB max	2.4 dB max
Passband Return Loss	2620 - 2690	15 dB	12 dB min	12 dB min
Attenuation:	2500 - 2570	72 dB	70 dB min	70 dB min


#### DL to UL Response

Attenuation for UL band	2500 - 2570	72 dB	70 dB min	70 dB min
Attenuation for DL band	2620 - 2690	66 dB	64 dB min	64 dB min

Note: CTS tests each unit to the critical specifications above. Subsequent audits may deviate due to repeatability among different test systems which shall not exceed these allowances.


Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Attenuation	1.0 dB

### Mechanical Drawing

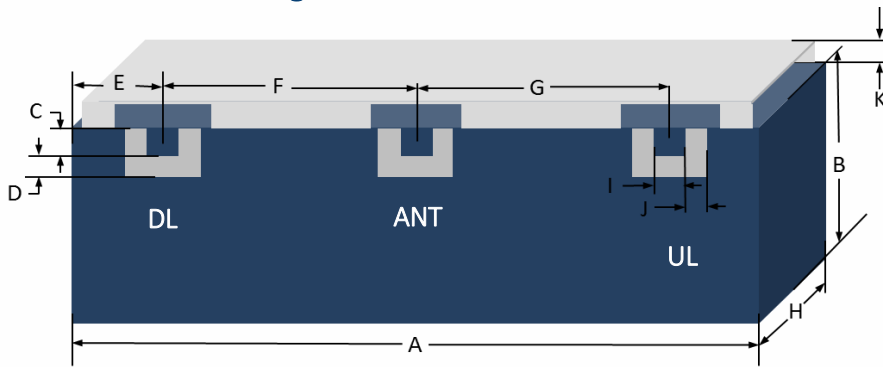


Dim.	Nominal (mm)	Tolerance (±mm or Max)
A	61.40	Max
B	6.80	Max
C	2.03	0.13
D	1.27	0.13
E	6.49	0.13
F	24.21	0.13
G	24.21	0.13
H	10.90	Max
I	2.03	0.13
J	1.27	0.13
K	2.00	Max

### PCB Layout

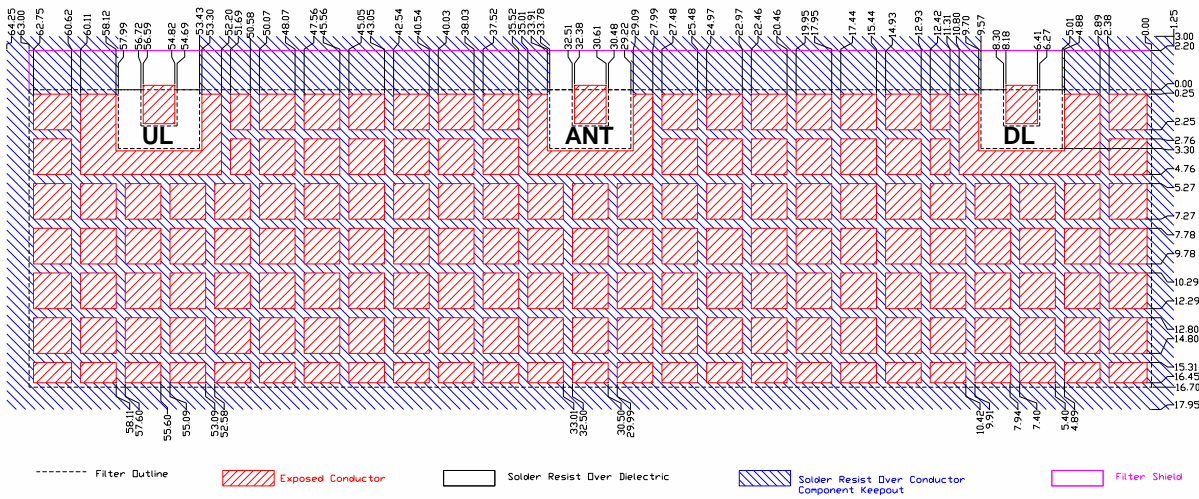

### Packaging and Marking

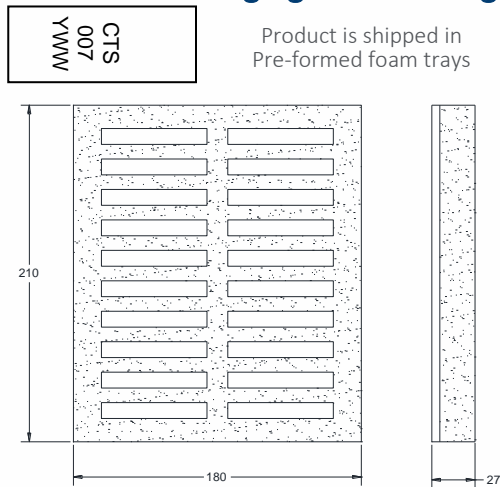

The trays have 20 slots each with 1 filter per slot. Boxes are packed with 12 Trays per box for a total of 240 filters per box.

### Electrical Response

